

AMERISTAR LP70


PREMIUM TRAILER

Multi-rib tread design provides excellent wet traction and lateral stability.

Visual Alignment Indicators (VAI®) alert user to tire tracking problems.

See through grooves aid in water evacuation providing excellent wet traction.

Lower aspect ratio promotes tire and vehicle stability and improved handling.

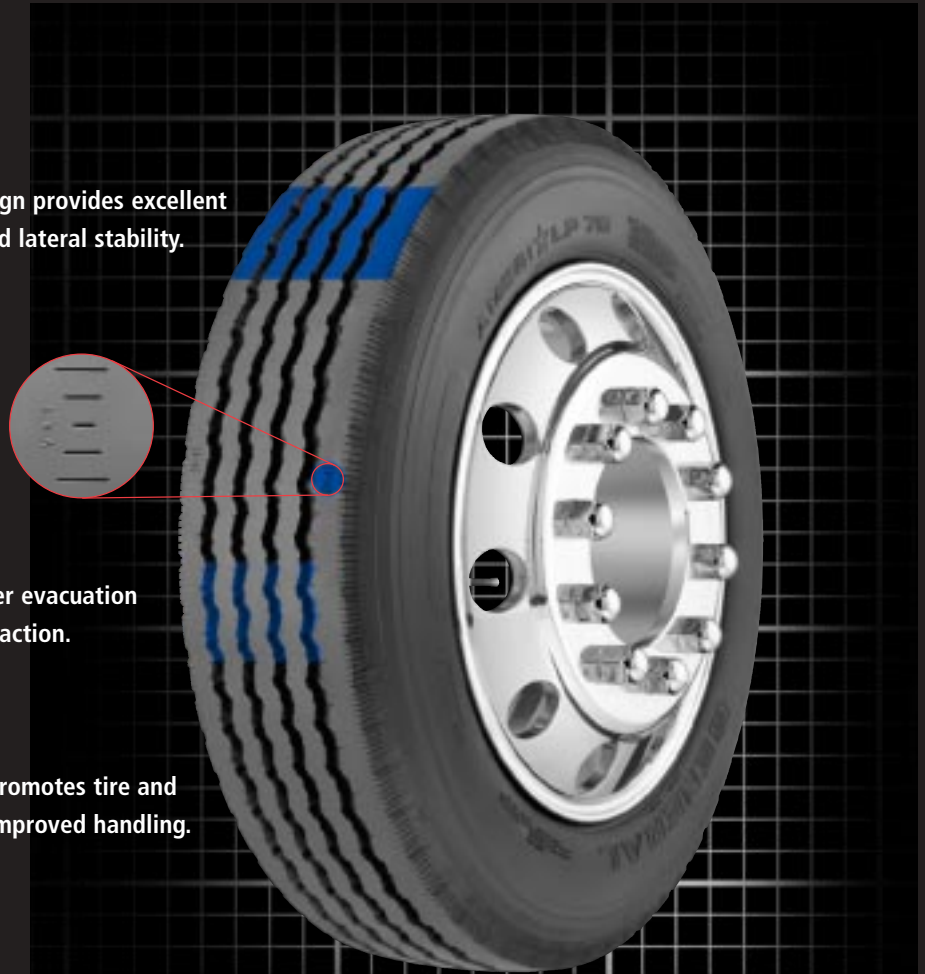

Applications

Trailer and free-rolling positions, steer position (depending on conditions).

TIRE SPECIFICATIONS Highway - 65 mph at loads indicated unless otherwise stated.

TIRE SIZE	LOAD RANGE	TREAD DEPTH	PRODUCT CODE	SAP ARTICLE NUMBER	RIM WIDTH IN	OVERALL INFLATED	OVERALL INFLATED	LOADED SECTION	STATIC LOADED	MINIMUM DUAL	REVS PER MILE	TIRE WEIGHT	MAX LOAD@INFLATION			
						DIAMETER IN (mm)	WIDTH IN (mm)	WIDTH IN (mm)	RADIUS IN (mm)	SPACING IN (mm)	(KM)	LB (KG)	lbs (KG)	psi (KPa)	lbs (KG)	psi (KPa)
255/70R22.5*	H	16/32	0201638	05680580000	7.50	36.6 (930)	10.3 (262)	11.5 (292)	16.9 (429)	11.3 (287)	566 (352)	86 (39)	5510 (2500)	120 (830)	5070 (2300)	120 (830)

Note: Minimum Dual Spacing calculated without chains.
These specifications subject to change without notice.

*Approved rim widths are 7.5 and 8.25. See Tire and Rim Yearbook for 15 degree drop center rim contour.