


GENERAL PURPOSE DRIVE

Aggressive tread design offers excellent traction in all weather conditions.

Traction ridges provide increased traction in mud and snow.

Cut and tear-resistant compound stands up to the rigors of city and short-haul service conditions.

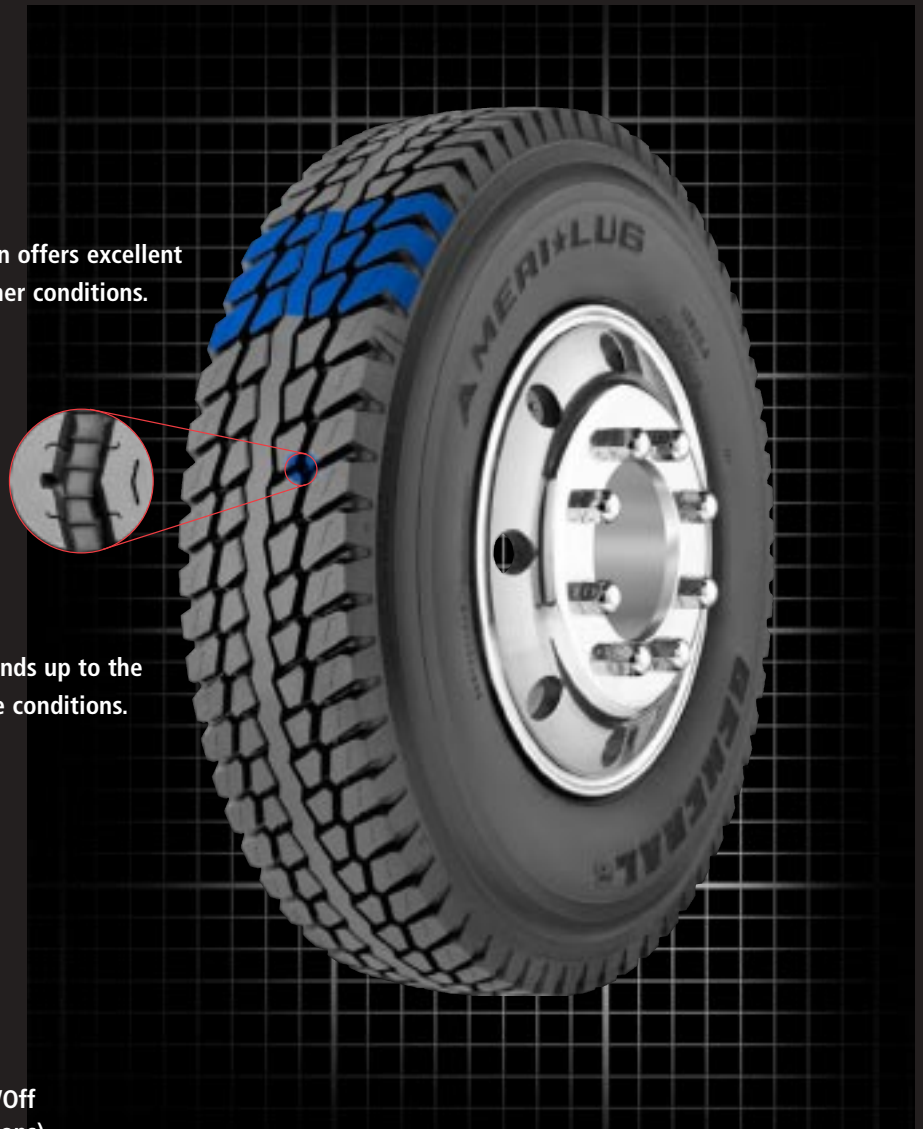

Applications

Drive position short and long haul. On/Off highway service (depending on conditions).

TIRE SPECIFICATIONS Highway - 65 mph at loads indicated unless otherwise stated.

TIRE SIZE	LOAD RANGE	TREAD DEPTH	PRODUCT CODE	SAP ARTICLE NUMBER	RIM WIDTH IN	OVERALL INFLATED DIAMETER IN (mm)	OVERALL INFLATED WIDTH IN (mm)	LOADED SECTION WIDTH IN (mm)	STATIC LOADED RADIUS IN (mm)	MINIMUM DUAL SPACING IN (mm)	REVS PER MILE (KM)	TIRE WEIGHT LB (KG)	MAX LOAD@INFLATION			
													SINGLE lbs (KG)	psi (KPa)	DUAL lbs (KG)	psi (KPa)
10R22.5	G	26/32	0237477	05681940000	7.50	40.5 (1029)	9.8 (249)	10.8 (274)	18.7 (475)	11.4 (290)	511 (318)	106 (48)	5675 (2575)	115 (790)	5355 (2430)	115 (790)

Note: Minimum Dual Spacing calculated without chains.
These specifications subject to change without notice.