


MULTI-PURPOSE ALL-POSITION SERVICE

Multi-rib tread design provides excellent performance in all-position service.

Multi-service tread compound provides good mileage and cut and tear resistance.

Traction ridges provides increased traction in mud and snow.

Available in a wide range of sizes for market coverage to fit your needs.

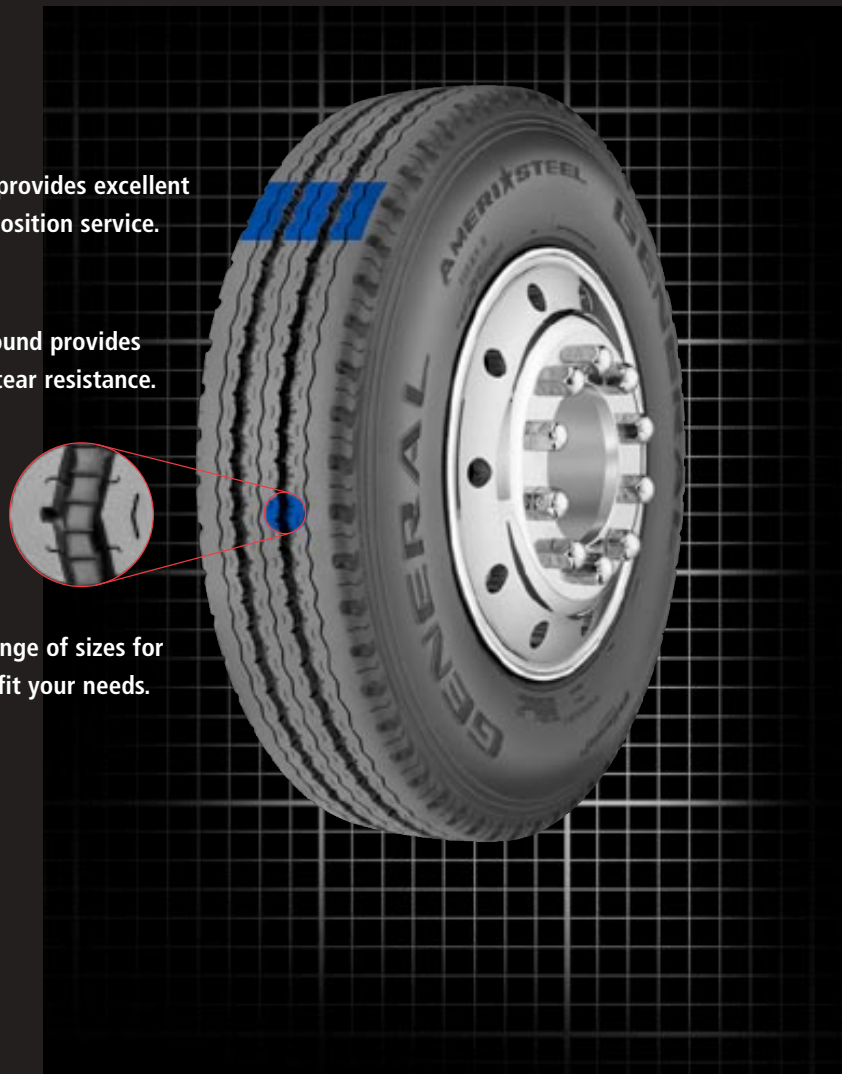

Applications

General rib designs for all-position service, local delivery and short haul.

TIRE SPECIFICATIONS

Highway - 65 mph at loads indicated unless otherwise stated.

TIRE SIZE	LOAD RANGE	TREAD DEPTH	PRODUCT CODE	SAP ARTICLE NUMBER	RIM WIDTH IN	OVERALL INFLATED DIAMETER IN (mm)	OVERALL INFLATED WIDTH IN (mm)	LOADED SECTION WIDTH IN (mm)	STATIC LOADED RADIUS IN (mm)	MINIMUM DUAL SPACING IN (mm)	REVS PER MILE (KM)	TIRE WEIGHT LB (KG)	MAX LOAD@INFLATION			
													Single lbs (KG)	Single psi (KPa)	Dual lbs (KG)	Dual psi (KPa)
10R22.5**	G	18/32	0237329	05681920000	7.50	39.9 (1013)	9.9 (251)	11.4 (290)	18.4 (467)	11.4 (290)	518 (322)	95 (43)	5675 (2575)	115 (790)	5355 (2430)	115 (790)
11R22.5	G	18/32	0237604	05680220000	8.25	41.3 (1049)	10.8 (274)	12.2 (310)	19.2 (488)	12.5 (318)	500 (311)	111 (50)	6175 (2800)	105 (720)	5840 (2650)	105 (720)
11R22.5*	H	18/32	0237612	05719690000	8.25	41.3 (1049)	10.8 (274)	12.2 (310)	19.2 (488)	12.5 (318)	500 (311)	113 (51)	6610 (3000)	120 (830)	6005 (2725)	120 (830)
11R24.5	H	18/32	0237639	05680420000	8.25	43.3 (1100)	10.8 (274)	12.2 (310)	20.2 (513)	12.5 (318)	476 (296)	122 (55)	7160 (3250)	120 (830)	6610 (3000)	120 (830)

Note: Minimum Dual Spacing calculated without chains.
These specifications subject to change without notice.

*ECE Certified.
**Tread patterns may vary