

# S370

## ON/OFF HIGHWAY ALL-POSITION


Stone Ejection System reduces stone retention for casing durability and offers multiple retread opportunities.

Visual Alignment Indicators (VAI®) alert user to tire tracking problems.

Tread compound specially formulated to provide high mileage for on-highway driving, and resists cuts and tears in off-road use.

### Applications

Bottom dumps, end dumps, coal haulers, school buses, waste haulers, beverage trucks, local delivery.

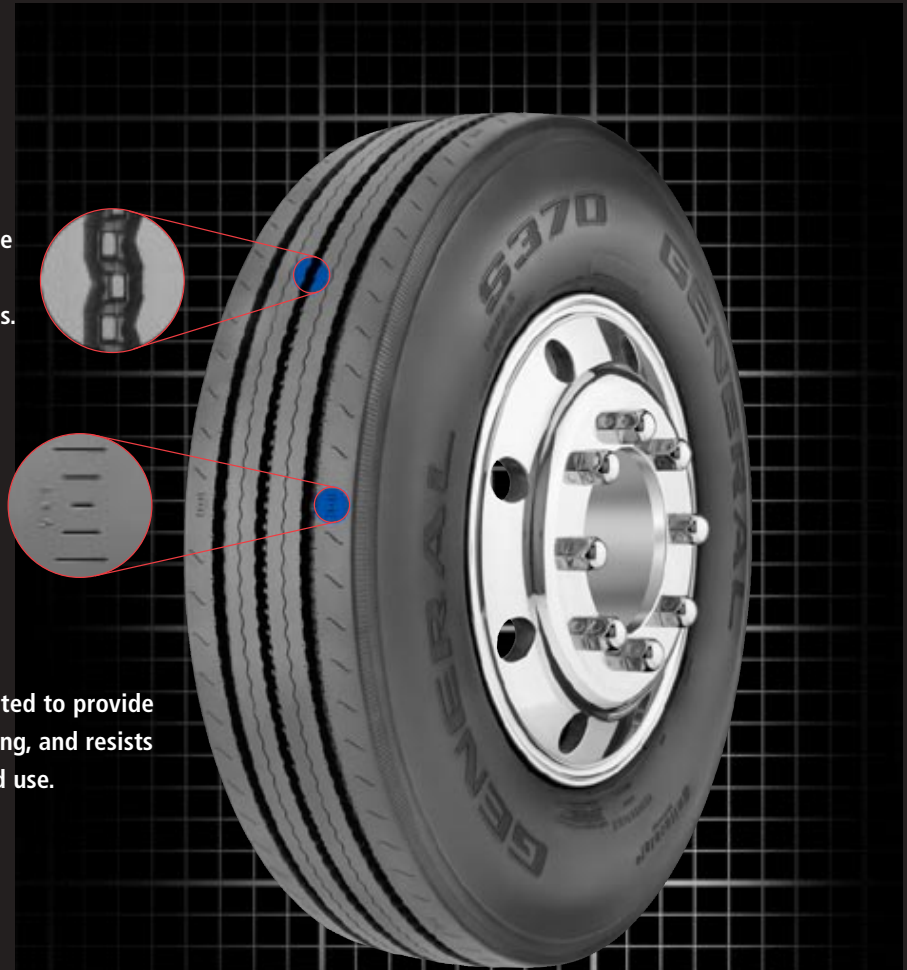

## TIRE SPECIFICATIONS Highway - 65 mph at loads indicated unless otherwise stated.

TIRE SIZE	LOAD RANGE	TREAD DEPTH	PRODUCT CODE	SAP ARTICLE NUMBER	RIM WIDTH IN	OVERALL INFLATED DIAMETER IN (mm)	OVERALL INFLATED WIDTH IN (mm)	LOADED SECTION WIDTH IN (mm)	STATIC LOADED RADIUS IN (mm)	MINIMUM DUAL SPACING IN (mm)	REVS PER MILE (KM)	TIRE WEIGHT LB (KG)	MAX LOAD@INFLATION			
													SINGLE (KG)	psi (KPa)	DUAL (KG)	psi (KPa)
11R22.5*	H	18/32	0238372	05680230000	8.25	41.4 (1052)	11.1 (282)	12.0 (305)	19.3 (490)	12.5 (318)	500 (311)	113 (51)	6610 (3000)	120 (830)	6005 (2725)	120 (830)
11R24.5	H	18/32	0238376	05680460000	8.25	43.3 (1100)	11.1 (282)	12.0 (305)	20.3 (516)	12.5 (318)	477 (297)	122 (55)	7160 (3250)	120 (830)	6610 (3000)	120 (830)
295/75R22.5	H	18/32	0238384	05680830000	8.25	40.0 (1016)	11.1 (282)	12.6 (320)	18.7 (475)	12.5 (318)	515 (320)	111 (50)	6940 (3150)	120 (830)	6175 (2800)	120 (830)
285/75R24.5	H	18/32	0238388	05680670000	8.25	41.3 (1049)	10.7 (272)	12.1 (307)	19.4 (493)	12.5 (318)	500 (311)	117 (53)	6780 (3075)	120 (830)	6175 (2800)	120 (830)

Note: Minimum Dual Spacing calculated without chains.  
These specifications subject to change without notice.

\*ECE Certified.